

MODEL TK-1-K



CONSTRUCTION

Cone / Base: Seamless spun copper, 18 ga. (.043" thickness).

FUEL

"Tiki Torch" fuel, kerosene, or lemon-scented Citronella Outdoor Lamp Oil, available at most hardware stores.

FUEL CAPACITY


45oz., averaging between 10 and 14 hours burn time. The torch is filled from the top by unscrewing the wick holder (with the wick).

WICK

Braided cotton torch wick, 1" diameter, 12" length. Extra wicks are available at some hardware stores and from Beachside.

IGNITION

Manual ignition using extended lighter. Wick should be 1/2" maximum above wick holder.

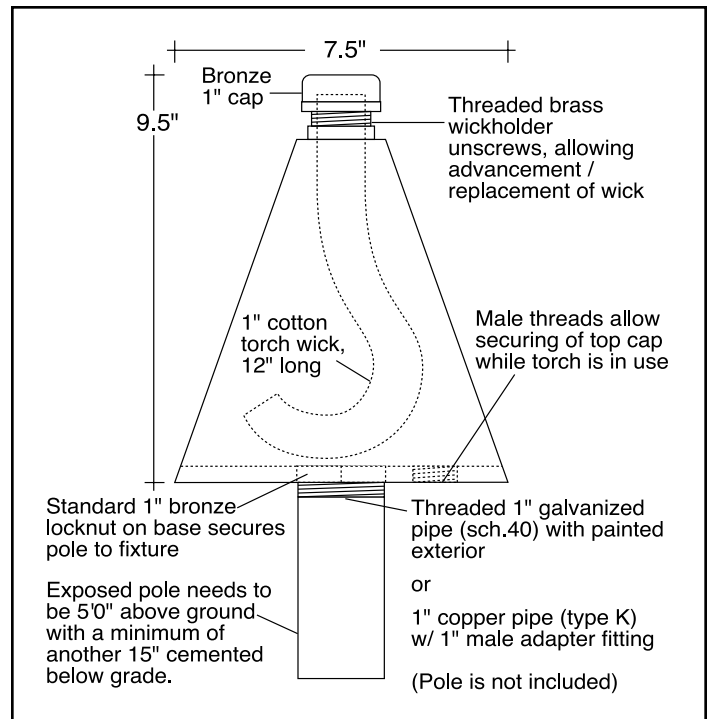

SAFETY PRECAUTIONS

- Pole needs to be a minimum of 5 feet above ground level. An additional 15" minimum is needed for placement below grade.
- Galvanized pole requires concrete installation. Copper pole may be mounted with hard packed dirt around the base.
- Fill no more than 2/3 full with Citronella, outdoor lamp oil or kerosene only. **Do NOT use gasoline or any other highly volatile fuel.**
- **Do NOT leave torch unattended during use.**
- Torch flame should be extinguished with a snuffer or small metal can. (Due to small surface area, use of torch's brass cap to extinguish flame is not recommended.)
- Oils are combustible! Discard used wick in a bucket of water or sealed metal container specifically for this purpose.



Phone: 808-263-5717 • Fax: 808-263-7961
www.BeachsideLighting.com