

MALAMA SERIES GAS TORCHES



TK-N-BOP (Natural gas)
TK-P-BOP (Propane gas)



TK-N-OHE (Natural gas)
TK-P-OHE (Propane gas)



TK-N-PUA (Natural gas)
TK-P-PUA (Propane gas)



BOP "Bird of Paradise"




OHE "Bamboo"



PUA "Flower"

Construction	Stainless steel decorative cylinder and base, 26 gauge. Solid brass fittings. Perforated stainless steel burner screen. Includes 1-inch brass shut-off valve.
Installation	Brass adapter at torch base threads onto 1-inch NPT male pipe threads.
Gas Usage	NATURAL GAS (TK-N-xxx): 22,500 BTU (6.6 kW) per hour at 7-inch wc (1.7 kPa) PROPANE GAS (TK-P-xxx): 14,600 BTU (4.3 kW) per hour at 11-inch wc (2.7 kPa)
Ignition	Manual ignition with extended lighter (by others)
Weight	4 lbs / 1.8 kg (5 lbs / 2.3 kg with valve)

MALAMA SERIES GAS TORCHES

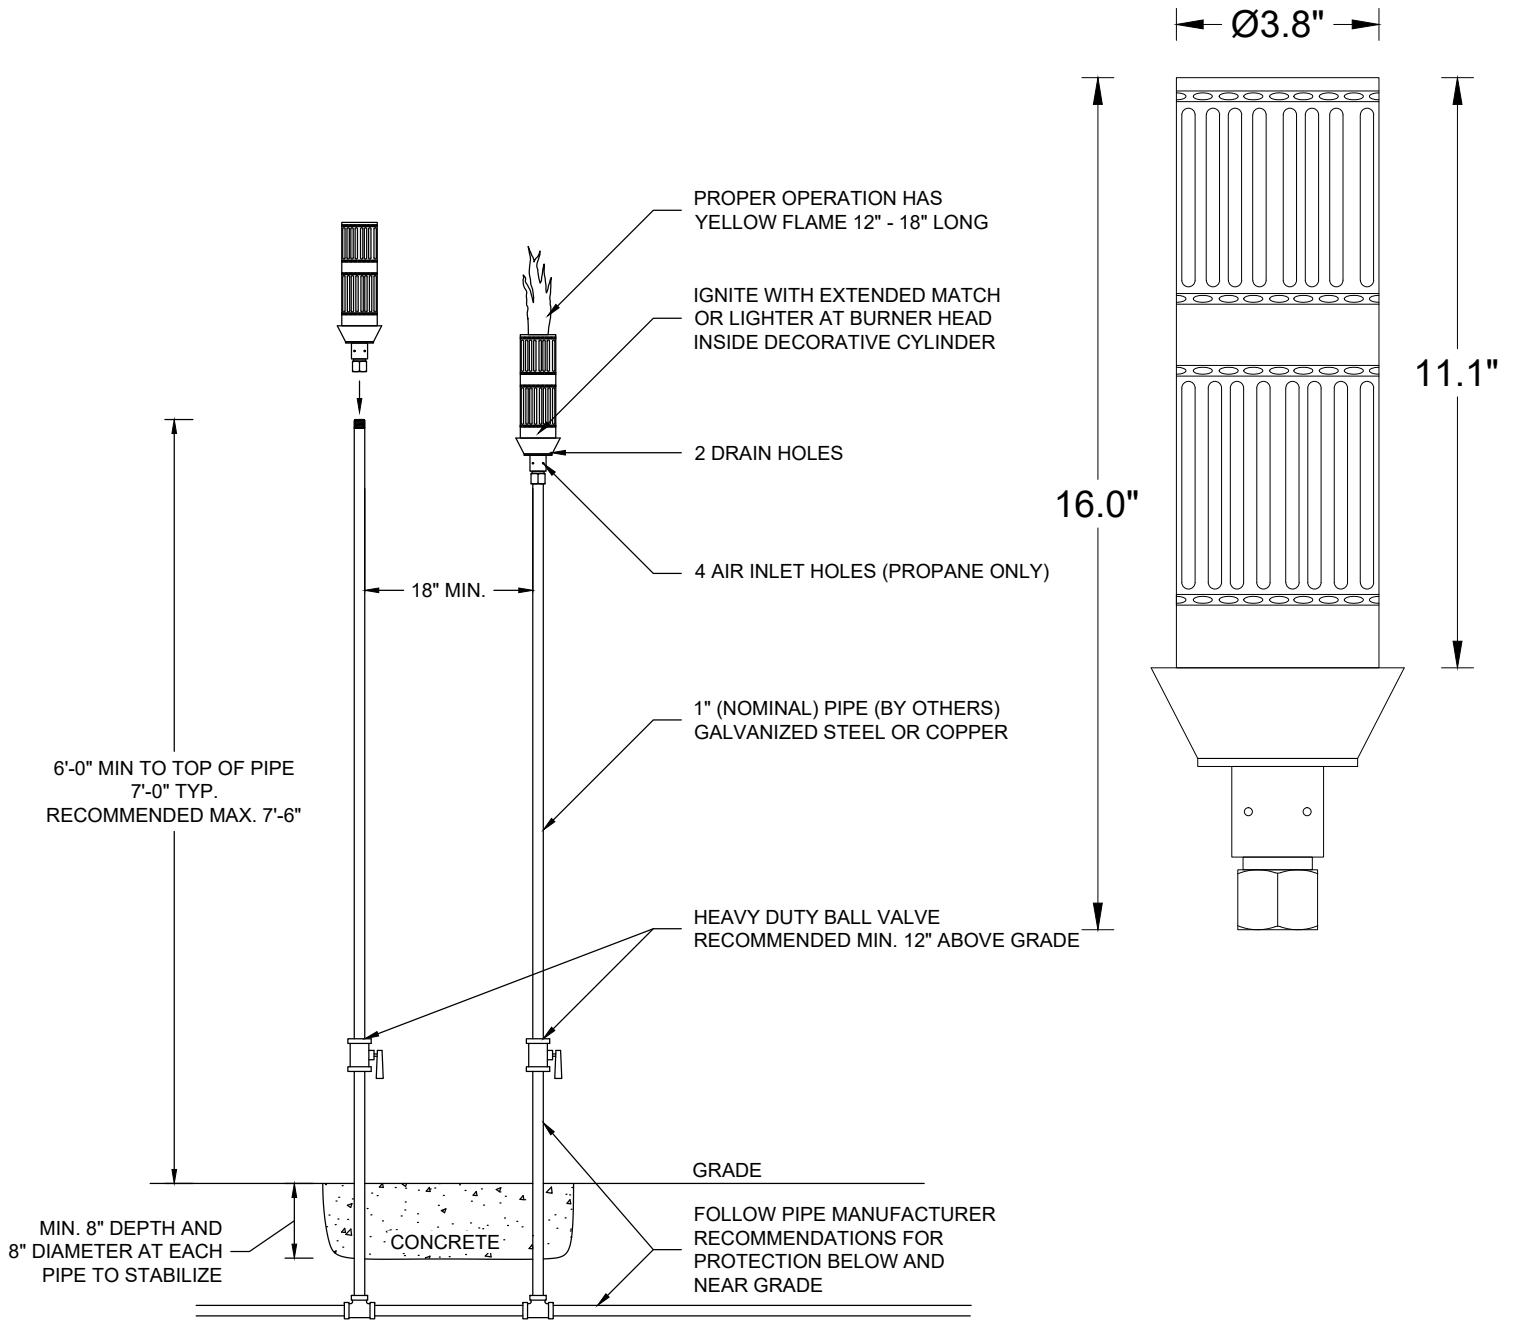

INSTALLATION STYLE SHOWN IS ONLY AN EXAMPLE. CONSULT A LICENSED PLUMBER AND FOLLOW APPLICABLE CODES FOR GAS PIPE LAYOUT AND INSTALLATION.

Always check local codes prior to installation. Consult a licensed plumber for gas pipe layout and installation.



CSA / AGA design certified
 CSA Listed US and Canada
 ANSI Z21.97-2017
 10-year fixture warranty